





AF-25 Feature

Portable Audio Distribution Box for press conference, simultaneous interpretation event, 2 x mic / Line XLR-M input connectors with volume control and input / output level selector, directly connect to microphone or Mixer output. VU meter for monitoring of signal level. 25 group output connectors suitable for XLR-M, 6.3mm phone jack, 3.5mm mini phone jack and RCA. top open strong case with space for cable storage.



Specification

Input Channel	2 x Microphone (Phantom power) or 2 x Line input (XLR-F)	
Input Sensitivity	Microphone -55dB Line 0 dB	
Output Channel	25 Channels	
AF Input Sockets	XLR-Female, Neutrik	
AF Output Sockets	XLR-Male, Neutrik (Balance, Transformer) 6.3mm mono socket (Unbalance) 3.5mm mono socket (Unbalance) RCA socket (Unbalance)	
Output Level	Microphone level..... 3mV Line level 1V (0dB)	
Frequency Response	70 - 15,000Hz +/- 3dB	
S/N Ratio	-60dB	
T.H.D. (1 KHz) 0dB Output	0.5%	
Output Impedance	600 ohms	
Operating Voltage	AC220V 50Hz	
Dimensions in mm with case	Approx. 550(W) x 435(D) x 145(H)	
Weight	Approx. 12KG	

— AF-25 Operation Procedure —

1	Plug in power
2	Switch on
3	Set the input line / mic switch according to the sensitivity of the microphone
4	Connect mic 1 and / or mic 2
5	Set the output line / mic switch according to the sensitivity of the receiving equipment
6	Connect the output to the receiving equipment

— User Guide —



Input



Microphone
-XLR-



Mixer
-XLR-



Monitor



Headphone
-6.3mm-



Earphone
-3.5mm-



Output




Camcorder
-XLR-




Recorder
-3.5mm/6.3mm/XLR-



Connection Cable
-XLR-F to 3.5mm-

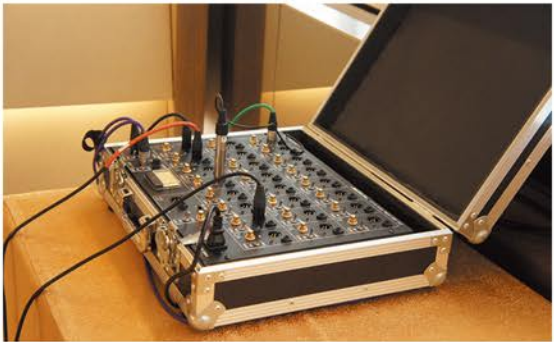

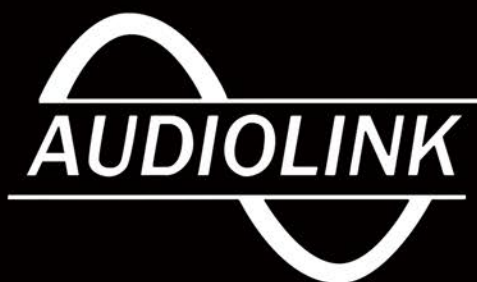

Your Audio Partner



AUDIO LINK SYSTEM COMPANY LTD.

Address : Unit 5, 16/F Thriving Industrial Center,

26-38 Sha Tsui Rd., Tuen Wan, Hong Kong

Tel : (852) 2416 6718

Fax : (852) 2412 0525

E-mail : sales@audiolinksys.com

Web : www.audiolinksys.com



Audio Link System Co., Ltd.



ISO 9001 : 2008
Certificate No.: CC 5995

AF-25