
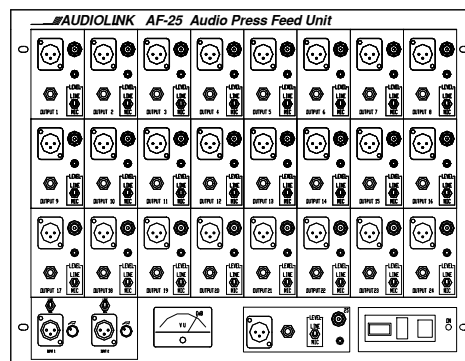


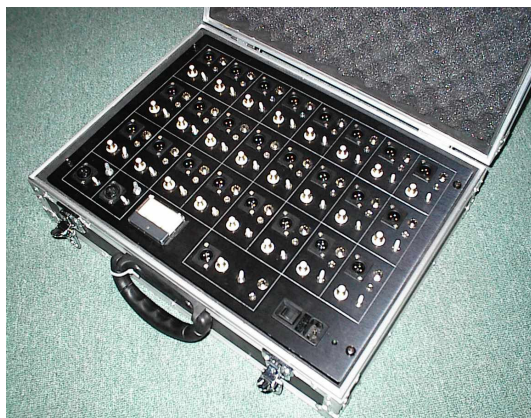

Feature

Portable Audio Distribution Box for press conference, simultaneous interpretation event, 2 x mic / Line XLR-M input connectors with volume control and input / output level selector, directly connect to microphone or Mixer output. VU meter for monitoring of signal level. 25 group output connectors suitable for XLR-M, 6.3mm phone jack, 3.5mm mini phone jack and RCA. top open strong case with space for cable storage.

Specification

Input Channel	2 x Microphone or 2 x Line input (XLR-Female)
Input Sensitivity	Microphone.....-55dB Line.....0dB
Output Channel	25 Channels
AF input sockets	XLR-Female ,Neutrik
AF output sockets	XLR-Male ,Neutrik (Balance, transformer) 6.3mm mono socket (Unbalance) 3.5mm mono socket (Unbalance) RCA socket (Unbalance)
Output Level	Microphone level -----3mV Line level-----1V (0dB)
Frequency Response	50-15,000Hz +/- 3dB
THD (1 KHz) 0dB output	0.5%
Output impedance	600 ohms
Operating voltage	AC220V 50Hz
Dimensions in mm with case	Approx. 550w x 435d x 145h
Weight	Approx. 12Kg

Options:

- XLR-F to 3.5mm stereo jack plug,
(3 meters cable)
- XLR-female to XLR-male
(10 meters cable)

