

AT-300 LINEAR GUIDE



Simple guide now with display!

AT-300 provides two options of control interface, one with traditional keypad and another with linear keypad. With linear keypad, it minimizes user error during the tour and helps user enjoy the tour more than the time they spend on figuring out the device on hand. The product is between AT-100 and AT-200, less complication and easier to view current status of the device.

Featuring 1.3 inch OLED display, IR emitter and built-in loop, AT-300 provides IR trigger function with anti-theft system. Data transfer supports USB 3.0 function, speeds up your transmitting speed when making the master device. The storage capacity is 8 GB which allows you to store up to 6000 minutes of recording contents. Built-in Li-Polymer batteries allow users to use 12 hours continuously which will be more than enough for opening hours in most occasions. What's more, AT-300 has Lip-accurate synchronization with any audiovisual application for better enjoyment of the tour experience without missing any information.

AT-300 also provides option on adding RF emitter module to provide 30 meter trigger capability. Moreover, tour guide function is also possible to be one of the options. Using 2.4 GHz, bandwidth technology, it turns AT-300 into tour guide and it creates infinite guide scenario for the tour.

Via using **okayo** Audio Master software, it makes the management of audio contents uploaded and downloaded easier and efficient. Also, with **okayo** Data Master software for data collection function, it allows administration to know how many times the devices being used, tracks being played, and etc. for smart management and analysis of data.




AT-300



AT-300PILOT



Traditional keypad
(Non-directional)

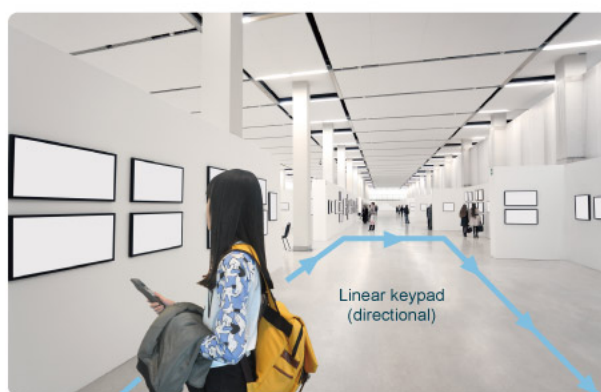

Entrance

EXIT



AT-300 linear guide

AT-300

AUDIO PARAMETERS

Audio format	High quality audio compression
Bandwidth	50 Hz ~ 18 kHz
Dynamic range	95 dB
Distortion	< 0.1 %
Speaker	Built-in 0.5 W @ 8 Ω
Earphone output	3.5 mm Jack x 2 (stereo)

GENERAL PARAMETERS

OLED display	1.3 inch (Blue Color 128 x 64)
Memory capacity	8 GB, supports up to 32 GB
Automatic triggering	IR, RFID and RF / TGS
Alarm	Anti-theft system
Number of languages	Max. 32
Number of messages	Max. 9900 x 32
Operating temperature	-10 °C ~ 50 °C
Battery	3.7 V, 1200 mAh Li-Polymer battery
Battery life	14 hours
Power consumption	85 mA
Dimensions (D x W x H)	29.6 x 55.3 x 200 mm
Weight	165 g (with battery)

UPLOADING SUPPORT

Software	OKAYO Audio Master OKAYO Data Master
OS Support	Windows
Download interface	USB 1.1 / USB 2.0
Download speed	2.5 Mbytes / sec @ ATC-210U Uploader 20 pcs @ 5 Mbyte / sec @ ATC-221U, Uploader

TOUR GUIDE MODE

Channel	100
Frequency	2.4 GHz
Operating Range	30 M line of sight