



OMG-25U 25-slot mounted charger and uploader



OMG-25C 25-slot mounted charger



okayo Audio Master 3

An easy compiling PC-based platform
for audio management

AUDIO GUIDE GENERAL PARAMETERS

Display	1.3" LCD, 132*64
Memory capacity	8 GB, support up to 32 GB
Automatic triggering	IR
Alarm	Anti-theft system
Number of language	Max. 32
Number of message	Max. 9,999 per language
Operating temperature	-10°C ~ 60°C
Battery	1 x 3.7V/1,300mAh Li-Polymer battery
Charging time	5 hours
Dimensions (D x W x H)	19.2 x 50.7 x 127.3 mm
Weight	95 g (with battery)

UPLOADING SUPPORT

Software	okayo Audio Master 3
Support OS	Windows
Download interface	USB 1.0 / USB 2.0
Download speed	5 Mbytes / sec @ OMG-25U Uploader

FREQUENCY & CHANNEL NUMBER

Frequency (MHz)	Number of Channel
794 ~ 806	30
806 ~ 810	30
823 ~ 832 & 863 ~ 865	30
863 ~ 865	17

- Channel quantity varies upon countries.
- Custom frequency on request.

AUDIO PARAMETERS

Audio format	High quality audio compression
Bandwidth	50 Hz ~ 18 kHz
Dynamic range	> 70 dB
Distortion	< 0.5 %
Speaker	Built-in 0.5 W @ 8 Ω
Battery life	18 hours for OMG-100
Earphone output	3.5 mm jack x 2 (stereo) for OMG-100 and OMG-100R; 3.5 mm jack x 1 (stereo) for OMG-100T

TOUR GUIDE OVERALL SYSTEM

Frequency range	748 MHz ~ 870 MHz
Modulation	4GFSK
RF output power	10 mW
Sensitivity	-100 dBm
Frequency response	200 Hz ~ 5 kHz
SNR	> 60 dB
T.H.D.	< 1.5 %
Operation range	> 50 meters
Battery life	10 hours for OMG-100T; 12 hours for OMG-100R
Weight	100 g (with battery)



 **OmniGuide**

Multifunctional Guiding System

It Guides Your Ways!


OmniGuide

OmniGuide, not only an audio player but a wireless transmitter/receiver, is a powerful system for both individual and group tours. Noise-free, clear sound, anti-theft design and infrared triggering optimize OmniGuide's onsite usage. 1.3" LCD and soft-touch keypad simplify users' operational experiences.


Being a wireless transmitter/receiver, a group guide can easily assign a track to OmniGuide being held by group members. Two-way mode is perfect for group discussion, lecturing and conferencing. Featuring touch-panel screen with multi-setting availability, OMG-25U allows users to charge and update OmniGuide easily. Okayo proprietary software *Audio Master* is a great PC tool of audio management.



Self-guided tour

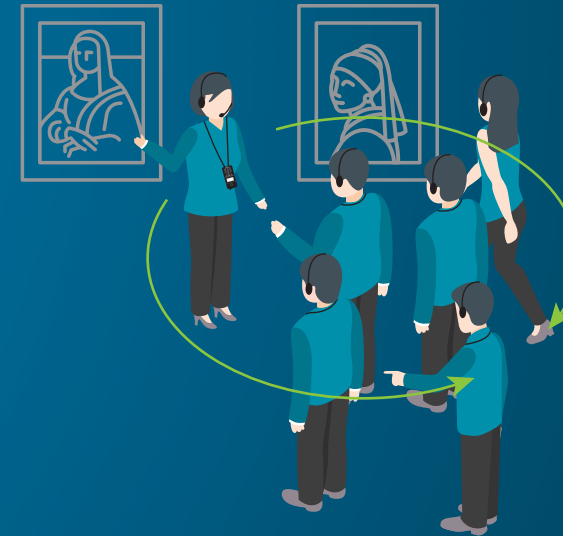


Live tour

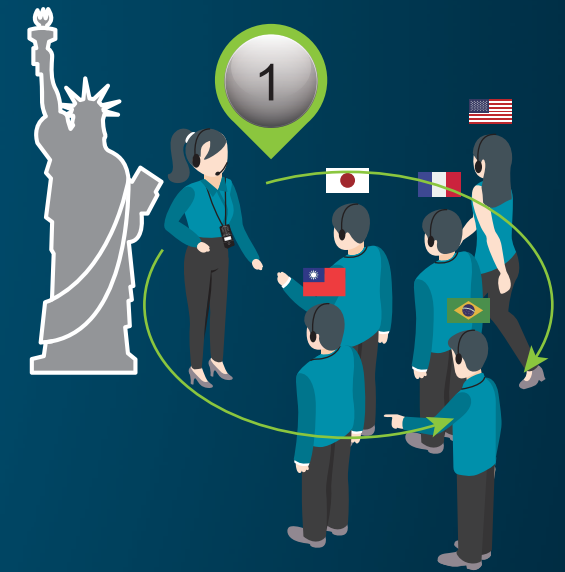

Multi-lingual tour



Uni-lingual tour

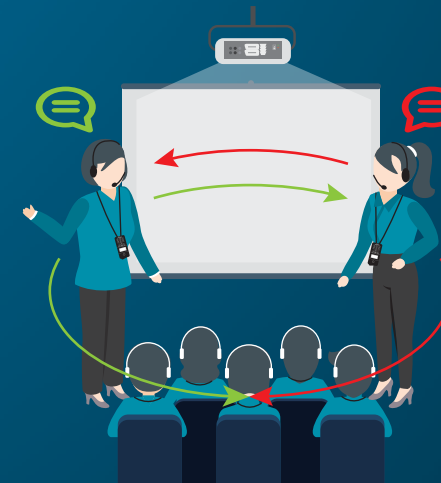

2-way tour



Talk-back tour



OMG-100

- 1.3" backlit display and comfortably pressed keypad.
- Incorporated HAC (Hearing Aid Compatible) speaker delivers great sound.
- 18-hour operation time meets full day usage.
- Embedded anti-theft system for exhibition control.
- Compact but robust design for lower upkeep.
- User-friendly *Audio Master* eases audio management.

OMG-100T / OMG-100R

- Digital wide spectrum 748-870MHz for various countries.
- Embedded anti-theft system for exhibition control.
- Infrared triggering for automatic commentary playback.
- Inbuilt microphone and push-to-talk button enrich tour experiences (OMG-100T only).
- Rack-mounted charger and uploader facilitate onsite management and dispensing.

